

Potential of filamentous fungi in the biodegradation of petroderivatives and evaluation of the effect of surfactants



<https://doi.org/10.56238/Connexpemultidisdevolpfut-005>

Hozana de Souza Ferreira

Graduate Program in Environmental Process Development - UNICAP

Maria Catarina de Farias Caldas

Graduate Program in Environmental Process Development - UNICAP

Pollyana Pereira do Nascimento

Graduate Program in Environmental Process Development - UNICAP

Maria Inez Campello Barata

Graduate Program in Environmental Process Development - UNICAP

Galba Maria de Campos-Takaki

Center for Research in Environmental Sciences and Biotechnology – NPCIAMB/UNICAP

Rosileide Fontenele da Silva Andrade

Center for Research in Environmental Sciences and Biotechnology – NPCIAMB/UNICAP

ABSTRACT

The contamination of the environment by petroleum products is a current and growing concern due to high toxicity and difficult removal. New ecologically viable technologies, such as bioremediation, have been gaining prominence for using microorganisms and their metabolites to remove or degrade pollutants that affect marine and terrestrial ecosystems. In this context, the objective of this work was to evaluate the growth potential of filamentous fungi (*Aspergillus foetidus* and

Rhizopus arrhizus) in petroderivatives, thus evaluating the potential of fungi in the biodegradation of petroderivatives (burnt motor oil, kerosene and diesel oil), in the presence and absence of surfactants. Therefore, the microorganisms were submitted to acclimatization in Sabouraud solid medium supplemented with different concentrations of burned motor oil (0%, 3% and 5%). Growth occurred during 72h at 28°C. Then, the microorganisms were transferred to tubes containing Haas Bushnel medium and the 2,6-dichlorophenol-indophenol redox indicator (DCPIP) in the presence and absence of surfactants (natural and chemical). The results showed that *Aspergillus foetidus* and *Rhizopus arrhizus* were able to grow at the maximum concentration of the petroderivative (5%), being therefore selected for the study of biodegradation. *Aspergillus foetidus* acclimatized with 5% of the burned engine oil was able to degrade (100%) the kerosene, both in the presence and absence of surfactants (chemical and natural). For the biodegradation of burnt engine oil (OQM) by *Aspergillus foetidus* the natural surfactant acted as a facilitating agent of biodegradation resulting in 100% degradation. *Rhizopus arrhizus* showed excellent biodegradation potential of diesel oil (100%), both in the presence and absence of surfactants (chemical and natural). Therefore, *Aspergillus foetidus* and *Rhizopus arrhizus* are promising microorganisms for biodegradation applications of kerosene and diesel oil, respectively. In addition, it was possible to prove that the surfactants (chemical and natural) did not show significant influence on the biodegradation of petroderivatives.

Keywords: Filamentous Fungi, Biodegradation, Surfactants, DCPIP.

1 INTRODUCTION

The pollution of the environment by petroderivatives resulting from accidental leaks or spills, use of by-products and the improper disposal of these compounds occur frequently in the world (ORTEGA et al., 2018; KUMAR et al., 2021).



Petroleum corresponds to a complex mixture of various hydrocarbons that has high viscosity, high density and low fluidity (SHI et al., 2021). Studies show that as the amount of benzene rings increase in petroleum hydrocarbons, the more difficult they become to degrade, becoming a major problem due to their low compatibility with the environment (low degradability) and their toxicological potential (JIMOH AND LIN, 2019; AMBUST et al., 2021; SARUBBO et al., 2022).

In refining, petroleum is fractionated into various types of materials, such as naphtha, gasoline, kerosene, lubricating oils, etc. (DA SILVA, 2022). Diesel oil is one of the most common petroleum products obtained from the refining of crude naphtha. It included high concentrations of hydrocarbons and low concentrations of sulfur, nitrogen and oxygen. flammable, toxic, low volatility product, with a strong smell (COSTA, 2022), while kerosene is composed of paraffins, cycloparaffins, aromatics and olefins, with carbon chains ranging from C9 to C20, being considered a toxic pollutant for human health and the environment (SILVA, 2023).

Physical and chemical agents are commonly applied to assist in the process of controlling and reducing environmental pollution caused by petroderivatives. However, due to the negative consequences of these treatments, it is necessary to develop new technologies that are biocompatible for recovery, removal or degradation of oil and derivatives (LAWNICZAK et al., 2020).

An ecologically friendly and efficient alternative is the use of microorganisms for the transformation of petroleum hydrocarbons into biomolecules of high added value (WU et al., 2019; SUBASHCHANDRABOSE et al., 2019; ZEGZOUTI et al., 2020). Allied to this biological alternative, studies reveal that filamentous fungi and yeasts can use petroleum hydrocarbons as a carbon source for growth, resulting in the biodegradation of these pollutants (BERDE, et al., 2022).

Microorganisms previously acclimatized in hydrophobic compounds (diesel oil, petroleum, kerosene, etc.) are indicated as promising for degradation of petroderivatives by the natural physiological conditions of adaptation to the contaminant (PASSOS et al., 2009).

Studies report the importance of adding a surfactant for the enhancement of this biodegradation process, as they can increase the solubility of pollutants (fungi and bacteria) (ABENA et al., 2019; Almansoory et al., 2019).

Therefore, the objective of this work was to investigate the potential of *Aspergillus foetidus* and *Rhizopus arrhizus* grown in petroderivatives, as well as to identify the potential for biodegradation in the presence of chemical and natural surfactant.

2 METHODOLOGY

2.1 MICROORGANISMS

The microorganisms used were *Aspergillus foetidus* UCP 360 and *Rhizopus arrhizus* UCP 1607 deposited in the culture bank of the Center for Research in Environmental Sciences and Biotechnology



(NPCIAMB) of the Catholic University of Pernambuco, Recife – Brazil, registered in the World Federation for Culture Collections (WFCC).

2.2 HAAS BUSHNEL HALF

The Bushnel Haas – BH medium has the following composition: 0.2 g/L MgSO₄, 0.02 g/L CaCl₂, 1.0 g/L KH₂PO₄, 1 g/L K₂HPO₄, 1.0 g/L NH₄NO₃ and 0.05 g/L FeCl₂. This medium was previously sterilized at 121°C for 15 minutes and used for biodegradation studies.

2.3 REDOX INDICATOR 2,6-DICHLOROPHENOL-INDOPHENOL-DCPIP

The redox indicator 2,6-dichlorophenol-indophenol (DCPIP) was used to detect the degradation potential of petroderivatives by microorganisms. The method considers positive for biodegradation when the DCPIP changes the original color from blue (oxidized state) to colorless (reduced state) (HANSON et al., 1993).

2.4 PETRODERIVATIVES

The petroderivatives used for the biodegradability test were burnt engine oil (OMQ) collected at a local fuel station, previously sterilized at 100°C, diesel and kerosene (commercial) sterilized by filtration in a membrane of 0.22 µm porosity (KASVI, model K18-230).

2.5 SURFACTANTS

The natural surfactant (biosurfactant) used for the study of biodegradation was produced by the fungus *Cunninghamella echinulata* UCP 1299 (ANDRADE et al., 2018) isolated from the soil of the Caatinga in Pernambuco, Brazil, obtained from the UCP Culture Collection, Catholic University of Pernambuco, registered in the World Federation for Culture Collections (WFCC). The chemical surfactant used was Tween-80 solubilized at 1%.

2.6 ACCLIMATIZATION OF MICROORGANISMS

The microorganisms were grown in solid sabouraud medium containing burnt motor oil – OMQ. For this method, OMQ was added in different concentrations (0%, 3% and 5%) in Petri dishes containing Sabouraud Agar medium. The experiment was carried out in triplicate. Soon after, the plates were inoculated with the respective microorganisms for acclimatization at 28°C for 72h.

2.7 INOCULUM

After the growth of the acclimatized microorganisms in Sabouraud medium containing concentrations of 0%, 3% and 5% of the petroderivative (burnt motor oil), a disc of the fungal mycelium (6 mm) was used as inoculum in the biodegradation assay.



2.8 STUDY OF THE BIODEGRADATION OF PETRODERIVATIVES

The biodegradation potential of petroderivatives (burnt engine oil, kerosene and diesel) by microorganisms was investigated in test tubes containing 9.7 mL of Bushnel Has medium – BH. Soon after, 200 µL of 2,6-dichlorophenol-indophenol – DCPIP redox indicator solution (0.5 g/L), 100 µL of the petroderivative, 100 µL of the natural surfactant, 100 µL of the chemical surfactant and the inoculum were added to the BH medium according to the conditions described in Table 1. The control media were prepared under the same conditions in the absence of the inoculum. The result of the degradation potential of petroderivatives was analyzed from the reduction of the DCPIP indicator (HANSON et al., 1993). The test tubes were incubated under static conditions and in the absence of light for 72h at 28°C.

Table 1: Conditions for evaluation of biodegradation using different petroderivatives (burnt motor oil, kerosene and diesel)

PETRODERIVATIVE 1- BURNT ENGINE OIL						
Conditions	Half BH (µL)	DCPIP (µL)	Inoculum (Disc)	Surfactant natural (µL)	Chemical surfactant (µL)	Petroderivado (µL)
1	9,7	200	-	-	-	100
2	9,7	200	1	-	-	100
3	9,7	200	1	100	-	100
4	9,7	200	1	-	100	100
PETRODERIVATIVE 2- KEROSENE						
5	9,7	200	-	-	-	100
6	9,7	200	1	-	-	100
7	9,7	200	1	100	-	100
8	9,7	200	1	-	100	100
PETRODERIVADO 3- DIESEL						
9	9,7	200	-	-	-	100
10	9,7	200	1	-	-	100
11	9,7	200	1	100	-	100
12	9,7	200	1	-	100	100

* (-) Absence of the component.

Source: The author.

2.9 DETECTION OF BIODEGRADATION

To identify the occurrence of biodegradation of petroderivatives (burnt motor oil, kerosene and diesel) by microorganisms, aliquots of 2 mL were removed from each tube, transferred to eppendorfs and subjected to centrifugation at 12000 rpm and 15°C for 5 min. Soon after, absorbance at 600 nm was determined in a UV/Vis spectrophotometer (model Libra S32, Biochrom Ltd.) (Ozyurek & Bilkay,



2020). The absorbance data collected were used to calculate the percentage of biodegradation according to Equation 1 (MAMITHA, et al., 2013).

(Eq 1)

$$\text{Biodegradation \%} = \left(1 - \frac{\text{sample absorbance}}{\text{control absorbance}}\right) \times 100$$


3 RESULTS AND DISCUSSION

3.1 GROWTH POTENTIAL OF FILAMENTOUS FUNGI ACCLIMATIZED IN BURNT MOTOR OIL

The fungi *Aspergillus foetidus* (Figures 1) and *Rizopus arrhizus* (Figures 2) were able to grow in Saboraud agar medium supplemented with burnt motor oil at all tested concentrations (0%, 3% and 5%) after 72h (Figure 2). Thus, *Aspergillus foetidus* and *Rizopus arrhizus*, grown at the maximum concentration of the petroderivative (5%), were selected for the biodegradation experiments.


Several authors point out that the previous adaptation of microbial cultures to the pollutant is an essential step in the process of biodegradation of hydrocarbons, resulting in a significant increase in the degradation potential (AAMAND, JORGENSEN, ARVIN and JENSEN, 1989; LEAHY and COLWELL, 1990; Sálleh et al., 2003; MIRANDA et al., 2007; ALMEIDA, 2013; COSTA et al., 2022).

Figure 1: Acclimatization of *Aspergillus foetidus* in different concentrations of burned motor oil: 0%, 3% and 5%

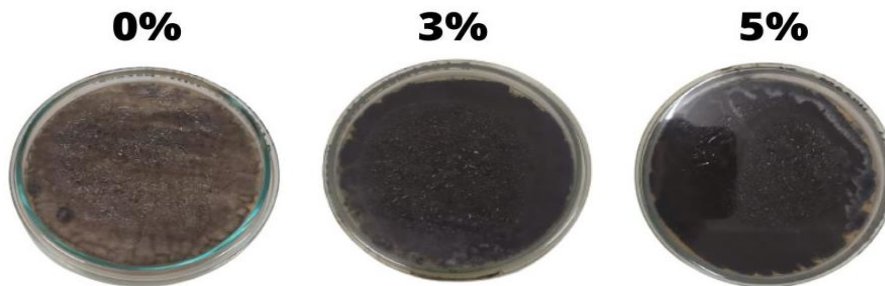

Source: The Author, 2023.

Figure 2: Acclimatization of *Rhizopus arrhizus* in different concentrations of burned motor oil: 0%, 3% and 5%

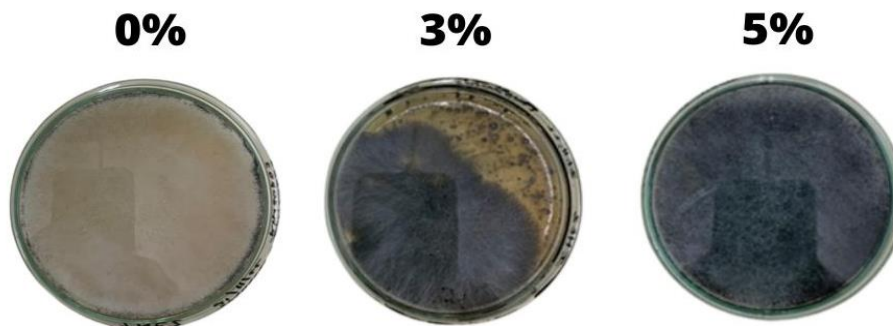

Source: The Author, 2023.



3.2 POTENTIAL OF *ASPERGILLUS FOETIDUS* IN THE BIODEGRADATION OF PETRODERIVATIVES AND STUDY OF THE INFLUENCE OF NATURAL SURFACTANT AND CHEMICAL SURFACTANT

Aspergillus foetidus UCP 360 acclimatized in 5% burnt engine oil is a promising biodegradation fungus, promoting 93-100% degradation. Among the petroderivatives tested, kerosene was the one that *A. foetidus* managed to fully degrade (100%). The surfactants (natural and chemical) did not influence the acceleration of the degradation of kerosene and diesel oil. In the process of biodegradation of burnt motor oil (OMQ) by *Aspergillus foetidus* there was a significant influence of the natural surfactant as a facilitating agent of biodegradation resulting in 100% degradation (Table 2). Da Silva et al. (2022) obtained similar results in the growth of *Aspergillus* sp. inoculated in Sabouraud agar medium supplemented with burnt motor oil and after 72h there was excellent microbial growth at the maximum concentration of petroderivative tested (10% OMQ).

Table 2: Evaluation of the potential of *Aspergillus foetidus* UCP 360 (acclimatized in 5% of burned engine oil) in the biodegradation of petroderivatives and influence of natural and chemical surfactant

*Tests	Composition	Acclimatization concentration of <i>Aspergillus foetidus</i> (%)	Petroderivados		
			OMQ (%)	Kerosene (%)	Diesel (%)
2,6,10	medium BH + DCPIP + inoculum	5	93,3	100	93,0
3, 7, 11	medium BH + DCPIP + inoculum + natural surfactant + petroderivative	5	100	100	93,3
4, 8, 12	medium BH + DCPIP + inoculum + chemical surfactant + petroderivative	5	96,6	100	93,3

* Composition of the tests - Test 2: medium BH + DCPIP + inoculum + OMQ; Assay 3: BH medium + DCPIP + inoculum + biosurfactant + OMQ; Assay 4: BH medium + DCPIP + inoculum + chemical surfactant + OMQ; Test 6: BH + DCPIP medium + inoculum + kerosene; Assay 7: BH medium + DCPIP + inoculum + biosurfactant + kerosene; Test 8: BH medium + DCPIP + inoculum + chemical surfactant + kerosene; Test 10: medium BH + DCPIP + inoculum + diesel; Test 11: medium BH + DCPIP + inoculum + biosurfactant + diesel; Test 12: medium BH + DCPIP + inoculum + chemical surfactant + diesel.

3.3 POTENTIAL OF *RHIZOPUS ARRHZUS* UCP 1607 IN THE BIODEGRADATION OF PETRODERIVATIVES AND STUDY OF THE INFLUENCE OF NATURAL SURFACTANT AND CHEMICAL SURFACTANT

Rhizopus arrhizus UCP 1607 showed excellent biodegradation potential of diesel oil (100%). In addition, *R. arrhizus* was also potentially able to degrade burnt engine oil and kerosene with values



between 93-96% biodegradation. On the other hand, the surfactants (natural and chemical) did not influence the acceleration of the degradation of kerosene and burnt engine oil (Table 3). Thus, it was possible to verify that diesel oil was an excellent source of carbon and energy for *Rhizopus arrhizus*.

Table 3: Evaluation of the potential of *Rhizopus arrhizus* UCP 1607 in the biodegradation of petroderivatives

*Tests	Composition	Acclimatization concentration of <i>Rhizopus arrhizus</i> (%)	Petroderivados		
			OMQ (%)	Kerosene (%)	Diesel (%)
2,6,10	Medium BH + DCPIP + inoculum	5	96,6	100	100
3, 7, 11	BH medium + DCPIP + inoculum + natural surfactant + petroderivative	5	96,6	96,6	100
4, 8, 12	BH medium + DCPIP + inoculum + chemical surfactant + petroderivative	5	93,3	96,6	100

* Composition of the tests - Test 2: medium BH + DCPIP + inoculum + OMQ; Assay 3: BH medium + DCPIP + inoculum + biosurfactant + OMQ; Assay 4: BH medium + DCPIP + inoculum + chemical surfactant + OMQ; Test 6: BH + DCPIP medium + inoculum + kerosene; Assay 7: BH medium + DCPIP + inoculum + biosurfactant + kerosene; Test 8: BH medium + DCPIP + inoculum + chemical surfactant + kerosene; Test 10: medium BH + DCPIP + inoculum + diesel; Test 11: medium BH + DCPIP + inoculum + biosurfactant + diesel; Test 12: medium BH + DCPIP + inoculum + chemical surfactant + diesel.

Source: Author.

4 CONCLUSION

Aspergillus foetidus and *Rizopus arrhizus* were able to grow at the maximum concentration of the petroderivative (5%). The maximum biodegradation by *Aspergillus foetidus* occurred when using kerosene as a carbon source, while for *Rhizopus arrhizus* the maximum biodegradation potential was when using diesel oil (100%), which proves that these filamentous fungi have potential for use in environments impacted with petrodrivados. Additionally, the presence of the surfactant (chemical and natural) did not influence biodegradation.



REFERENCES

- BENGUENAB, A., CHIBANI, A. Biodegradation of petroleum hydrocarbons by filamentous fungi (*Aspergillus ustus* and *Purpureocillium lilacinum*) isolated from used engine oil contaminated soil, *Acta Ecologica Sinica*, Volume 41, Issue 5, Pages 416-423, 2021.
- COSTA, E.R.C. et al. Biodegradação de óleo diesel por *Penicillium citrinum* UCP 1183 isolado de sedimentos de mangue. *Research, Society and Development*, v. 11, n. 10, p. e573111033071-e573111033071, 2022.
- DA SILVA, P.G.O. et al. Bioprospecção de fungos filamentosos isolados de sedimentos de mangue do estado de Pernambuco para biodegradação de petroderivados. *Research, Society and Development*, v. 11, n. 9, p. e11311931559-e11311931559, 2022.
- DECESARO, A., REMPEL, A., MACHADO, T. S., CAPPELLARO, Â. C., MACHADO, B. S., CECHIN, I., & COLLA, L. M. Bacterial biosurfactant increases ex situ biodiesel bioremediation in clayey soil. *Biodegradation*, 32(4), 389-401, 2021.
- EL HANAFY, A. A., ANWAR, Y., MOHAMED, S. A., AL-GARNI, S. M. S., SABIR, J. S., ZINADAH, O. A. A., & AHMED, M. M. Isolation and molecular identification of two fungal strains capable of degrading hydrocarbon contaminants on Saudi Arabian environment. *International Journal of Bioengineering and Life Sciences*, 9(12), 1215-1218. 2015.
- FENIBO, D., IJOMA, G.N., SELVARAJAN, R. et al. Tensoativos microbianos: as biomoléculas multifuncionais de próxima geração para aplicações na indústria do petróleo e sua remediação ambiental associada. *Micro-organismos*, 7, p. 581, 2019.
- GALITSKAYA, P. *et al.* Response of bacterial and fungal communities to high oil pollution in different soils. *Sci. Rep.* 11, 164, 2021.
- GUARINO, C., SPADA, V., SCIARRILLO, R. Avaliação de três abordagens de biorremediação (Atenuação Natural, Agricultura Terrestre e Bioagumentação – Agricultura Assistida) para um solo contaminado por hidrocarbonetos de petróleo. *Quimiosfera*, 170, p. 10-16, 2017.
- HANSON, K.G, DESAI, JD, & DESAI, AJ. Uma técnica de degradação de petróleo bruto de triagem rápida e simples para microrganismos potenciais. *Biotechnology Techniques*, 7(1), 745-748, 1993.
- HARMS, H., SCHLOSSER, D. & WICK, L. Y. Untapped potential: exploiting fungi in the bioremediation of hazardous chemicals. *Nat. Rev. Microbiol.* 9, 177–192, 2011.
- LAWNICZAK, L., WOZNIAK-KARCZEWSKA, LOIBNER, M., HEIPIEPER, A.P., CHRZANOWSKI, H.J. Microbial degradation of hydrocarbons-basic principles for bioremediation: a review. *Molecules* 25, 856, 2020
- LIN, M.W., VON LAU, E., POH, P.E. Um guia abrangente de tecnologias de remediação para solos contaminados por petróleo – trabalhos atuais e edições futuras. *Mar. Pollut. Bull.*, 109, p 14- 45, 2016.
- LOTFINASABASL, Sakineh; GUNALE, V. R.; RAJURKAR, N. S. Assessment of petroleum hydrocarbon degradation from soil and tarball by fungi. *Bioscience Discovery*, v. 3, n. 2, p. 186-192, 2012.



- MIRI, S., NAGHDI, M., ROUISSI, T., BRAR, S.K., MARTEL, R. Recentes avanços biotecnológicos na degradação de hidrocarbonetos de petróleo em condições de clima frio: uma revisão. *Crit. Rev. Ambiente. Technol.*, 49, pp. 553-586, 2019.
- ORTEGA, M.F., GUERRERO, D.E., GARCÍA-MARTÍNEZ, M.J., BOLÔNIO, D., LHAMAS, J.F., CANOIRA, L. GALEGO, J.L.R. Otimização das alterações da agricultura com base na textura do solo e na concentração de petróleo bruto. *Água, Ar, Poluição do Solo.*, 229, p. 234, 2018.
- OZYUREK, S.B., AVCIOGLU, N. H., & SEYIS BILKAY, I. Mycoremediation potential of *Aspergillus ochraceus* NRRL 3174. *Archives of microbiology*, 203(10), 5937-5950, 2021.
- PASSOS, C.T., BURKERT, J. F. M., KALIL, S. J., BURKERT, C. A.V. Biodegradação de fenol por uma nova linhagem de *Aspergillus* sp. Isolada. *Quim. Nova*, Vol. 32, No. 4, 950-954, 2009.
- ROCHA E SILVA, N.M.P., MEIRA, H.M., ALMEIDA, F.C.A., *et al.* Tensoactivos naturais e suas aplicações para a remoção de óleos pesados na indústria. *Sep Purif Rev*, 48 (4), p. 267-281, 2019.
- SAHARIAH, B. P., & CHATTERJEE, T. Bioremediation of Mine tailings from Chhattisgarh, India. *Geomicrobiology Journal*, 1-11, 2022.
- SAJNA,V., SUKUMARAN, R.K., GOTTUMUKKALA, L.D., PANDEY, A. Biodegradação de petróleo bruto auxiliada por biossurfactantes de *Pseudozyma* sp. NII 08165 ou seu caldo de cultura. *Biorrecurso. Technol.*, 191, p. 133-139, 2015.
- SARDROOD, B.P., GOLTAPPEH, E.M., VARMA, A. Uma introdução à biorremediação Fungos como Biorremediadores. Springer, pp. 3-27, 2013.
- SHI, L., LIU, C., CHEN, M., HUA, Z., YE, Z., ZHANG, J. Synthesis and evaluation of a hyperbranched copolymer as viscosity reducer for offshore heavy oil. *Journal of Petroleum Science and Engineering*, Volume 196, 2021.
- SUBASHCHANDRABOSE, S.R., VENKATESWARLU, K., NAIDU, R., MEGHARAJ, M. Biodegradation of high-molecular weight PAHs by *Rhodococcus wratislaviensis* strain 9: Overexpression of amidohydrolase induced by pyrene and BaP. *Science of The Total Environment*, Volume 651, Part 1, 2019.
- STELIGA, T. Role of fungi in the biodegradation of petroleum hydrocarbons in drilling residues. *Pol. J. Ambiente. Garanhão*. 21, 471–479, 2012.
- VANISHREE, M.; THATHEYUS, A. J.; RAMYA, D. Biodegradation of petrol using *Aspergillus* sp. *Annual research & review in biology*, p. 914-923, 2014.
- WU, M., WU, J., ZHANG, X., YE, X. Effect of bioaugmentation and biostimulation on hydrocarbon degradation and microbial community composition in petroleum-contaminated loessal soil. *Chemosphere*, Volume 237, 2019.
- YE, J.-S., YIN, H., QIANG, J., PENG, H., QIN, H.-M., ZHANG, N., & HE, B.-Y. Biodegradação do antraceno por *Aspergillus fumigatus*. *Jornal de materiais perigosos*, 185(1), 174-181, 2011.
- ZEGZOUTI, Y., BOUTAFDA, A., EZZARIAI, A., EL FELS, L., EL HADEK, M., HASSANI, L. A. I., HAFIDI, M. Bioremediation of landfill leachate by *Aspergillus flavus* in submerged culture: Evaluation of the process efficiency by physicochemical methods and 3D fluorescence spectroscopy, *Journal of Environmental Management*, Volume 255, 2020.



ZHANG, J. H., XUE, Q. H., GAO, H., MA, X., & WANG, P. Degradação do petróleo bruto por preparações enzimáticas fúngicas de *Aspergillus* spp. para uso potencial na recuperação aprimorada de óleo. *Jornal de Tecnologia Química e Biotecnologia*, 91(4), 865–875, 2016.

Sarubbo, LA; Silva, MGC; Durval, IJB; Bezerra, KGO; Ribeiro, BG; Silva, IA; Banat, IM
Biossurfactantes: Produção, propriedades, aplicações, tendências e perspectivas. *Bioquim. Eng. J.* 2022 , 181 , 108377.

AA Jimoh , J. Lin

Biossurfactante: uma nova fronteira para tecnologia mais verde e sustentabilidade ambiental
Ecotoxicol. Ambiente. seguro , 184 (2019) , Artigo 109.607

Manish Kumar, Nanthi S. Bolan, Son A. Hoang, Ankush D. Sawarkar, Tahereh Jasemizad, Bowen Gao, S. Keerthanan, Lokesh P. Padhye, Lal Singh, Sunil Kumar, Meththika Vithanage, Yang Li, Ming Zhang, M.B. Kirkham, Ajayan Vinu, Jörg Rinklebe,

Remediation of soils and sediments polluted with polycyclic aromatic hydrocarbons: To immobilize, mobilize, or degrade?, *Journal of Hazardous Materials*, Volume 420, 2021, 126534, ISSN 0304-3894,

Shweta Ambust, Amar Jyoti Das, Rajesh Kumar, Bioremediation of petroleum contaminated soil through biosurfactant and *Pseudomonas* sp. SA3 amended design treatments, *Current Research in Microbial Sciences*, Volume 2, 2021, 100031, ISSN 2666-5174,

ABENA, Marie Thérèse Bidja et al. Biodegradação de hidrocarbonetos totais de petróleo (TPH) em solos altamente contaminados por atenuação natural e bioaumento. *Chemosphere* , v. 234, pág. 864-874, 2019.

ALMANSOORY, Asia Fadhile et al. Biossurfactante produzido por bactérias degradadoras de hidrocarbonetos: Caracterização, atividade e aplicações na remoção de TPH de solo contaminado. *Tecnologia Ambiental e Inovação* , v. 14, p. 100347, 2019.